

ARS



I.D.	O.D.	W.P.	Roll length	Part-no:
13 mm	19 mm	10 bar	100/40/25/20/15	AWAAR012
19 mm	26 mm	10 bar	100/30/25/20	AWAAR019
25 mm	33 mm	10 bar	100/30/25/20	AWAAR025
32 mm	44 mm	10 bar	60/40/20	AWAAR032
38 mm	50 mm	10 bar	50/20	AWAAR038

Waterslang roodgeribd - **Waterhose corrigated**

Rubber waterslang met polyester inlagen en roodgeribde buitenwand geschikt voor de industrie en de bouwindustrie.
Rubber water discharge hose, cover red corrigated, suitable for industry, buildingcontractors. Non kinkable and abrasion resistance.

Temperature : -20 up/to + 60 gr. Cel.
Bursting Pressure : 30 bar
Tube : Smooth Black
Cover : Red-corrigated

Hosereel



Haspelslang - **Hosereel hose**


Rubber haspelslang, niet knikbare roodgeribde waterslang voor drukslanghaspels, conform EN 694 en KIWA
Rubber water discharge hose, cover red corrigated, suitable for hosereels. Non kinkable and abrasion resistance, conform EN 694 and KIWA

Temperature : -15 up/to + 60 gr. Cel.
Bursting Pressure : 42 bar
Tube : Smooth Black
Cover : Red-corrigated

Marking : KIWA - AX - EN694 - A - 2-D - X - XX + prod.code
X = trimester of production - XX = year of production

I.D.	O.D.	gr/mtr	B.R.	W.P.	Roll length	Part-no:
19 mm	26 mm	290	180	12 bar	20 / 25 / 30	AWAHA019
25 mm	33 mm	470	220	12 bar	20 / 25 / 30	AWAHA025

Eurocord-Glas

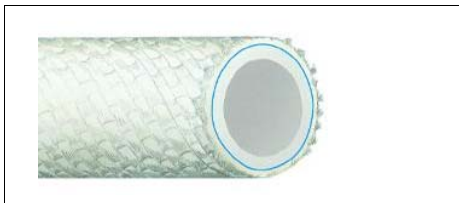

Rubber waterhose with Glasfiber

Industrial rubber water discharge hose with glasfiber outside, suitable for use with high temperatures

Temperure water : 100 degr. C.
Temperature ?? : Up to +450 degr. C.
Bursting Pressure : 60 bar
Tube : EPDM white
Cover : Glasfiber

I.D.	O.D.	W.P.	Roll length	Part-no:
13 mm	25 mm	20 bar	40 mtr	AKONO012
19 mm	31 mm	20 bar	40 mtr	AKONO019
25 mm	39 mm	20 bar	40 mtr	AKONO025
32 mm	48 mm	20 bar	40 mtr	AKONO032
38 mm	58 mm	20 bar	40 mtr	AKONO038
40 mm	57 mm	20 bar	40 mtr	AKONO040
42 mm	60 mm	20 bar	40 mtr	AKONO042
45 mm	62 mm	20 bar	40 mtr	AKONO045
50 mm	70 mm	20 bar	40 mtr	AKONO050
76 mm	96 mm	20 bar	40 mtr	AKONO075