

GEKA

SYSTEM GEKA



Water- & air couplings

Messing quick connection for water and air purposes, suitable for industry, glasshouses, construction companies. We can also deliver this coupling in polyamide.

- Lug distance** : 40 mm
- Working pressure** : water - max. 40 bar
Air - maxi. 30 bar

Geka-coupling

Part no:



3/8	IGEKK10
1/2	IGEKK12
5/8	IGEKK16
3/4	IGEKK19
1	IGEKK25
1.1/4	IGEKK32
1.1/2	IGEKK38

Geka-adaptor BSP-male

Part no:



3/8	IGEKA10
1.2	IGEKA12
3/4	IGEKA19
1	IGEKA25
1.1/4	IGEKA32
1.1/2	IGEKA38

Geka-adaptor BSP-female

Part no:




3/8	IGEKI10
1/2	IGEKI12
3/4	IGEKI19
1	IGEKI25
1.1/4	IGEKI32
1.1/2	IGEKI38

Geka-cap

Part no:




Nokafstand 40 mm
IGEKD

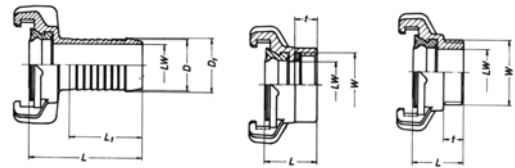

Air king

Universal air couplings

Air king couplings are for air service only and available in Malleable iron, brass and stainless steel 316.

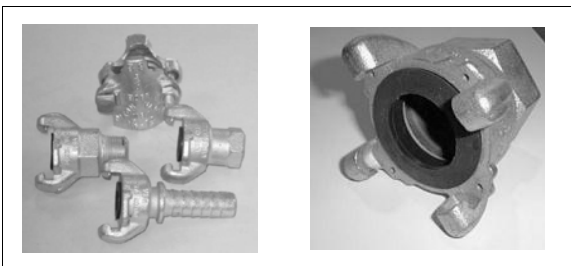

- Working pressure** : 175 psi
- Washers** : Standard fitted with IAWR4 washers
- Thread** : NPT thread only available
- Clamps** : Use Boss malleable iron clamps

WARNING : Never use AIR-KING for steam service.

Malleable iron

Size	Hose ends	Female	Male
		NPT ends	NPT ends
1/4	IAMH	IAMC1	IAMB1
3/8	IAM1	IAMC	IAMB
1/2	IAM5	IAM3	IAM2
3/4	IAM6	IAM8	IAM7
1	IAM11	IAM13	IAM12

Also available in brass and 316 Stainless steel



FEMALE NPT ENDS



MALE NPT ENDS



HOSE ENDS

The use of an AIR-KING safety clip wire retainer is necessary to assure the coupling will not become accidentally disconnected. This guarantees the fittings are properly connected as pin will not go through holes in mating glances until couplings are locked in place.