


Camlock

Cam and groove couplings

Camlock type quick connect coupling, in aluminium, Stainless Steel 316, messing/brass and polyprop. Normally standard BSP thread, NPT on request.

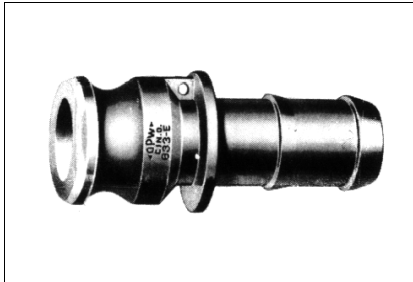

Maximum workingspressure by 20°C

	SS	ALU	MS	PP
3/4"	17 bar	17 bar	17 bar	7 bar
1"	17 bar	17 bar	17 bar	7 bar
1.1/4"	17 bar	17 bar	17 bar	-
1.1/2"	17 bar	17 bar	17 bar	7 bar
2"	17 bar	17 bar	17 bar	7 bar
2.1/2"	14 bar	10 bar	10 bar	-
3"	14 bar	9 bar	9 bar	4 bar
4"	10 bar	7 bar	7 bar	-

Type	633-A male female thr	633-B female male thr	633-C female pillar	633-D female female thr	633-E male pillar	633-F male male thr	634-A plug male	634-B Kap female
3/4"	J?3A019	J?3B019	J?3C019	J?3D019	J?3E019	J?3F019	J?4A019	J?4B019
1"	J?3A025	J?3B025	J?3C025	J?3D025	J?3E025	J?3F025	J?4A025	J?4B025
1.1/4"	J?3A032	J?3B032	J?3C032	J?3D032	J?3E032	J?3F032	J?4A032	J?4B032
1.1/2"	J?3A038	J?3B038	J?3C038	J?3D038	J?3E038	J?3F038	J?4A038	J?4B038
2"	J?3A050	J?3B050	J?3C050	J?3D050	J?3E050	J?3F050	J?4A050	J?4B050
2.1/2"	J?3A065	J?3B065	J?3C065	J?3D065	J?3E065	J?3F065	J?4A065	J?4B065
3"	J?3A075	J?3B075	J?3C075	J?3D075	J?3E075	J?3F075	J?4A075	J?4B075
4"	J?3A100	J?3B100	J?3C100	J?3D100	J?3E100	J?3F100	J?4A100	J?4B100
6"	J?3A150	J?3B150	J?3C150	J?3D150	J?3E150	J?3F150	J?4A150	J?4B150

? Stands for material : A=Aluminium - M=Messing - P=Polyprop - R=Stainless Steel

Kamvalock® Coupled With Valve Open

1. Couple In Any Position
2. Cam Arms Lock Coupler And Adaptor Together
3. Lever Opens Valves
4. Full Flow Starts

Dry Disconnect Couplings

Eteha bv - Slangtechniek