

America Oil



- ◆ All data refers to performance at 18°C.
- ◆ Any increase of temperature, above or below, will affect the performance data.
- ◆ We reserve the right to change all technical data without prior notice.

AMERICA - Oil suction- and dischargehose

Description: A white helix embedded in blue oil resistant superelastic flexible pvc compound.

Applications: This hose is suitable for the medium duty suction and discharge of black fuel oils, gas oils, kerosene, paraffin, hydraulic oils, mineral based oils, lubricating oils and greases. It is not suitable for benzene, xylol and aromatic solvents.

Advantages: Although designed for medium duty applications this hose remains very flexible and is easy to handle in use.



Temperature Range: -20°C +55°C

Coil Length : 30 mtr.

Vacuum H2O : 7 mtr.

ID inches	Wall thickness mm	Weight gr/mtr	Bending Radius mm	WP bar
3/4	2,8	450	90	6
1	3	500	90	6
1.1/4	4.5	600	110	5
1.1/2	4.7	700	130	5
2	5.5	1050	175	4.5
2.1/2	6	1390	220	4
3	6.4	1700	270	3.5
4	7.4	2700	360	2.5
6	9	5000	530	1.5

Shark Hose®

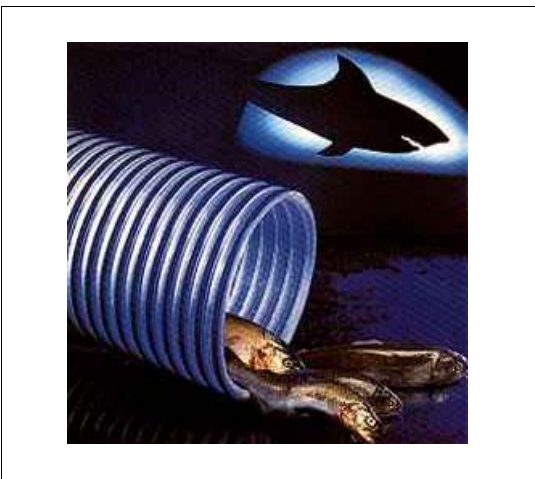

SHARK HOSE : suction- and dischargehose

Description: Flexible, non-toxic, transparant pvc, with grey PVC spiral and outer blue line. Smooth inside.

Applications: This hose is suitable for the medium duty suction and discharge on aquaculture pumps and for fish transport.

Advantages: Although designed for medium duty applications this hose remains flexible and is easy to handle in use.

Temperature Range: -25°C +55°C

Coil Length : 30 mtr.

ID inches	ID mm	Wall Thickness mm	Weight gr./mtr	Radius mm	Vacuum m/H2O	WP bar	BP bar
4	102	10 mm	2900	200	10	2.5	7.5
5	127	11 mm	3600	300	9.5	2.5	7.5
6	152	11.5 mm	5600	350	9.5	2	6
7	203	13.5 mm	9200	600	9.5	2	6
10	254	18 mm	14500	1000	9.5	1.5	4.5
12	304	20 mm	19000	1500	9.5	1.5	4.5