

PVC Blank



CHARACTERISTICS


Helder transparant materiaal, bestand tegen lage temperaturen.
Made with a cristal clear material and resistant to low temperatures.

USE

Doorvoer van vloeistoffen. Industrie
Delivery of liquids. Industry. To be used as level.


STRUCTURE

Zacht PVC zonder inlage.
One-layer soft PVC.

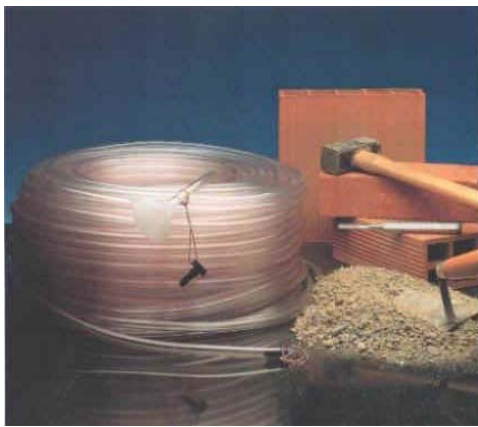

Inwendige diameter	Uitwendige diameter	Gewicht Gr./mtr	Rollengte	Artikelno:
3 mm	6 mm	25	200	CWABL003
4 mm	6 mm	20	200	
4 mm	7 mm	32	200	CWABL004
5 mm	8 mm	40	200	CWABL005
6 mm	9 mm	45	200	CWABL006
7 mm	10 mm	50	100	CWABL007
8 mm	12 mm	75	100	CWABL008
10 mm	14 mm	95	100	CWABL010
12 mm	17 mm	140	100	CWABL012
13 mm	19 mm	185	100	CWABL013
14 mm	19 mm	160	100	CWABL014
16 mm	22 mm	215	100	CWABL016
18 mm	25 mm	290	50	CWABL018
20 mm	27 mm	315	50	CWABL020
22 mm	30 mm	400	50	CWABL022
25 mm	34 mm	500	50	CWABL025
30 mm	40 mm	680	30	CWABL030
35 mm	45 mm	760	30	CWABL035
40 mm	50 mm	900	30	CWABL038
50 mm	60 mm	1200	30	CWABL050

Hotwash

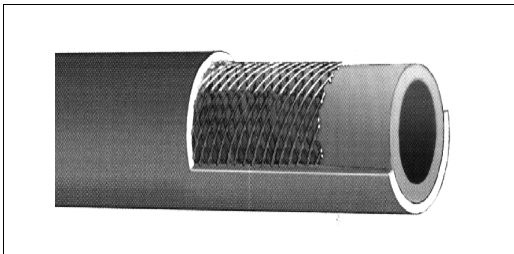

Temperatuurbereik : - 35°C / + 95°C
Werkdruk : 10 bar
Binnenwand : Wit, EPDM/PP
Buitenwand : Wit, EPDM/PP
: olie-, hitte- en ozonbestendig
Rollengte : Standaard 40 meter

Temperature range : - 35°C / + 95°C
Working pressure : 10 bar
Inner tube : White, EPDM/PP
Outer tube : White, EPDM/PP
oil-, temperature- and ozoneresistant

Inwendig diameter	Uitwendige diameter	Rollengte	Artikelno:
13 mm	23 mm	100 mtr	CHOT013
19 mm	30 mm	60 mtr	CHOT019

