

# EUROSTAR@



## Brandslangen, type RMC - Fire hoses RMC / VCM

Eurostar@ brandslangen, kleur rood, type RMC / VCM, vervaardigd van hoogwaardige synthetische garens en een EPDM rubberlining, rot- en schimmelvrij, bestand tegen lage en hoge temperaturen, ozon, weersinvloeden en lichte concentraties chemicaliën. rollengte 20 meter, maximaal 80 meter, Overige lengten op aanvraag  
Standard coil length 20 mtr, up to 80 mtrs, outside: synthetic woven textile reinforcement, inside: High tensile synthetic rubber, Maintenance free; do not need drying, Unaffected by mildew, Excellent resistance against ozone and Rot-proof and excellent abrasion resistance due to a synthetisch coating.  
According to: DIN - NBN S21-024 - BS Class 2 - Pr-EN 1924/1 and EN671-2 - **Veritas MED approval.**



**Vertias MED approved**


You can download the certificate from our website : [www.eteha.nl](http://www.eteha.nl)



**Leverbaar in  
zwart en blauw  
Also in black and blue**

Inches	mm	WP	BP	Part.no.
1	25 mm	20 bar	50 bar	ERMC0250
1.1/4	32 mm	20 bar	50 bar	ERMC0320
1.1/2	38 mm	20 bar	50 bar	ERMC0380
1.3/4	45 mm	20 bar	50 bar	ERMC0450
2	50 mm	20 bar	50 bar	ERMC0500
2.1/2	65 mm	20 bar	50 bar	ERMC0650
2.3/4	70 mm	20 bar	50 bar	ERMC0700
3	75 mm	15 bar	45 bar	ERMC0750
3.1/2	90 mm	15 bar	45 bar	ERMC0900
4	100 mm	15 bar	45 bar	ERMC1000
4.1/2	110 mm	15 bar	45 bar	ERMC1100
5	125 mm	15 bar	40 bar	ERMC1250
6	150 mm	15 bar	40 bar	ERMC1500
8	205 mm	14 bar	42 bar	ERMC2000

# DURASTAR@

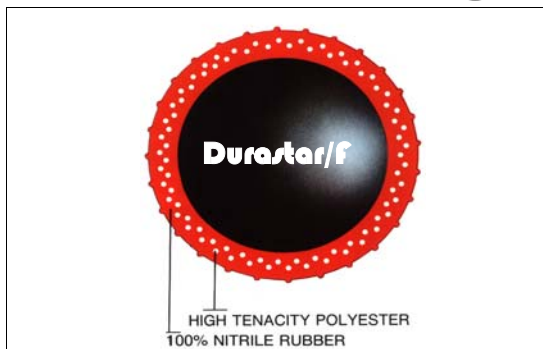

## Brandslangen - Fire hoses - type Durastar

Door de samenstelling van de Nitrile rubbercompound is een zeer slijtvaste brand/werkslang verkregen. Vervaardigd volgens UNE 23091 - 2B - Werkdruk 17 bar - Goede hittebestendigheid - Licht van gewicht en zeer flexibel - Goed bestand tegen chemische gassen - Goede bestendigheid tegen olien, zuren en alkalien.

If it is premium quality and performance you are looking for Eteha Durastar is the answer. Approved to and far exceeds the requirements of BS6391 Type 3, NEN - DIN - DOT approved, exceptional anti-kinking properties, Superior oil and chemical resistance, rugged abrasion resistance, outstanding heat resistance

Size		BP	Weigth	Wall th.	Durastar F
1.1/2 inch	38 mm	50 bar	325 gr / mtr	2.05 mm	EDUF0380
1.3/4 inch	45 mm	50 bar	410 gr / mtr	2.06 mm	EDUF0450
2 inch	52 mm	50 bar	475 gr / mtr	2.20 mm	EDUF0500
2.1/2 inch	65 mm	50 bar	600 gr / mtr	2.35 mm	EDUF0650
2.3/4 inch	70 mm	50 bar	680 gr / mtr	2.40 mm	EDUF0700
3 inch	75 mm	50 bar	725 gr / mtr	2.40 mm	EDUF0750
4 inch	102 mm	30 bar	950 gr / mtr	2.75 mm	EDUF1000



- *Approved to and far exceeds the requirements of BS6391 Type 3*
- *Exceptional anti-kinking properties*
- *Superior oil and chemical resistance*
- *Rugged abrasion resistance*
- *Outstanding heat resistance*

Profiel / Profile

