HOSE REEL ES310

- Spring rewind mechanism
- Latching system
- Max. 18m hose - ½“ hose
- Casing in painted steel or stainless steel
- Fixed and swivel mounting bracket
- Adjustable hose guide
- Mountable in any position

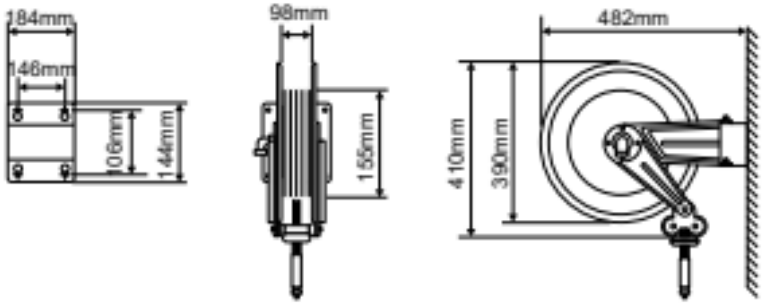

Painted steel

Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Cold water	without 15m	- ½"	20bar 12bar	90°C 50°C	brass brass	½" F ½" F	- brass coupling	1.310.100 1.310.101
Hot water	without 12m	- ½"	20bar 15bar	90°C 90°C	brass brass	½" F ½" F	- brass coupling	1.310.100 1.310.104
Compressed air	without 18m 15m	- 10mm 12,5mm	20bar 20bar 20bar	90°C 50°C 50°C	brass brass brass	½" F ½" F ½" F	- NW 7,2 NW 7,2	1.310.100 1.310.102 1.310.103
High pressure 100	without	-	100bar	130°C	stainless steel	⅜" F	-	1.310.200
High pressure 200	without 15m (black) 15m (blue)	- 8mm 8mm	200bar 200bar 200bar	130°C 130°C 130°C	stainless steel stainless steel stainless steel	⅜" F ⅜" F ⅜" F	- M22x1,5 F M22x1,5 F	1.310.300 1.310.301 1.310.302
High pressure 400	without 15m (black) 15m (blue)	- 8mm 8mm	400bar 400bar 400bar	130°C 130°C 130°C	stainless steel stainless steel stainless steel	⅜" F ⅜" F ⅜" F	- M22x1,5 F M22x1,5 F	1.310.400 1.310.401 1.310.402
Grease	without 12m 16m	- ¼" ¼"	400bar 400bar 400bar	60°C 60°C 60°C	steel zinced steel zinced steel zinced	⅜" F ⅜" F ⅜" F	- ¼" M ¼" M	1.310.500 1.310.501 1.310.502
Oil	without 12m 17m	- ⅜" ⅜"	150bar 150bar 150bar	60°C 60°C 60°C	steel zinced steel zinced steel zinced	⅜" F ⅜" F ⅜" F	- ⅜" M ⅜" M	1.310.900 1.310.901 1.310.902

HOSE REEL 310

Stainless steel

Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Cold water	without 15m	- ½“	20bar 12bar	90°C 50°C	brass brass	½“ F ½“ F	- brass coupling	1.314.100 1.314.101
Hot water	without 12m	- ½“	20bar 15bar	90°C 90°C	brass brass	½“ F ½“ F	- brass coupling	1.314.100 1.314.104
Compressed air	without 18m 15m	- 10mm 12,5mm	20bar 20bar 20bar	90°C 50°C 50°C	brass brass brass	½“ F ½“ F ½“ F	- NW 7,2 NW 7,2	1.314.100 1.314.102 1.314.103
High pressure 100	without	-	100bar	130°C	stainless steel	⅜“ F	-	1.314.200
High pressure 200	without 15m (black) 15m (blue)	- 8mm 8mm	200bar 200bar 200bar	130°C 130°C 130°C	stainless steel stainless steel stainless steel	⅜“ F ⅜“ F ⅜“ F	- M22x1,5 F M22x1,5 F	1.314.300 1.314.301 1.314.302
High pressure 400	without 15m (black) 15m (blue)	- 8mm 8mm	400bar 400bar 400bar	130°C 130°C 130°C	stainless steel stainless steel stainless steel	⅜“ F ⅜“ F ⅜“ F	- M22x1,5 F M22x1,5 F	1.314.400 1.314.401 1.314.402
Food	10m	½“	15bar	100°C	stainless steel	⅜“ F	brass coupling	1.314.204
Drinking water	10m	½“	20bar	60°C	stainless steel	⅜“ F	brass coupling	1.314.205
Grease	without 12m 16m	- ¼“ ¼“	400bar 400bar 400bar	60°C 60°C 60°C	steel zinced steel zinced steel zinced	⅜“ F ⅜“ F ⅜“ F	- ¼“ M ¼“ M	1.314.500 1.314.501 1.314.502
Oil	without 12m 17m	- ⅜“ ⅜“	100bar 150bar 150bar	60°C 60°C 60°C	stainless steel stainless steel stainless stee	⅜“ F ⅜“ F ⅜“ F	- ⅜“ M ⅜“ M	1.314.200 1.314.901 1.314.902