

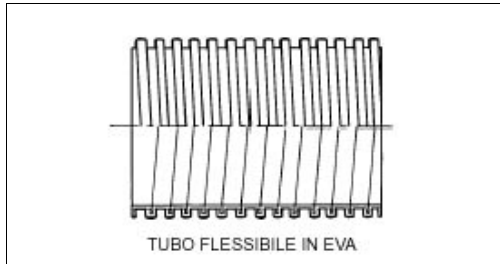


## Eva-Industrial

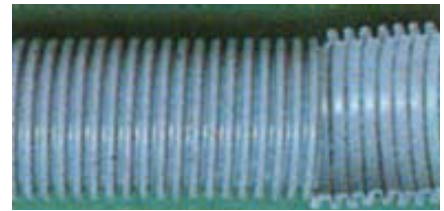

I.D. mm	O.D mm	Weight Gr/mtr	Bend-Radius	Vacuum Mtr/H2O	Rolllength	Part number
25	33	200	66 mm	5	30	CSTOEVA025
29	36	220	76 mm	5	30	CSTOEVA029
32	41	270	82 mm	5	30	CSTOEVA032
38	48	360	93 mm	5	30	CSTOEVA038
45	55	470	111 mm	5	30	CSTOEVA045
50	61	560	122 mm	5	30	CSTOEVA050
60	72	700	146 mm	4	30	CSTOEVA060
75	88	920	155 mm	4	15	CSTOEVA075
80	94	100	170 mm	4	15	CSTOEVA080

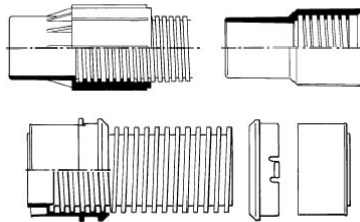

## Dusthose vacuumcleaner

- Flexible spiral hose made of ethyl-vinyl-acetate, unreinforced, very low flow loss, maximum bending without kinking.
- Applications: suction and ducting of air and dust.
- Temperature range from -30°C up to +60°C.
- In compliance with the most important European Standards regarding hoses for vacuum and wet and dry cleaners.

## Oregon dust



Ducting, dust and fumes extraction, suction of sawdust and yarns in the textile industry, ventilation.

Very smooth inside. Highly flexible and light in weight. Temperature range: -10° C +60° C.



I.D. mm	Weight Gr/mtr	Bend-radius	Vacuum Mtr/H2O	Roll-length	Part number
20	170	20	5	50	CAFOR020
25	185	25	5	50	CAFOR025
30	225	30	5	50	CAFOR030
32	255	32	5	50	CAFOR032
35	300	35	5	50	CAFOR035
38	310	38	5	50	CAFOR038
40	330	40	4	50	CAFOR040
45	370	45	4	50	CAFOR045
50	440	50	4	50	CAFOR050
60	560	60	4	50	CAFOR060
63	600	63	4	50	CAFOR063
70	640	70	4	50	CAFOR070
75	730	75	4	50	CAFOR075
80	790	80	4	30	CAFOR080
90	950	90	4	30	CAFOR090
100	980	100	4	30	CAFOR100
110	1120	110	4	30	CAFOR110
120	1300	120	4	30	CAFOR120
125	1360	125	4	30	CAFOR125
130	1440	130	4	30	CAFOR130
140	1600	140	4	30	CAFOR140
150	1760	150	4	30	CAFOR150
160	1930	160	4	20	CAFOR160
180	2300	180	4	20	CAFOR180
200	2650	200	4	20	CAFOR200
250	3600	250	4	15	CAFOR250
300	4500	300	4	10	CAFOR300